



tellus point round xs

RGBW_{quad}

TECHNICAL DATASHEET

tellus point round xs

RGBWquad

Technical Data

Dimensions	130 mm x 130 mm x 119 mm [L x W x H] 5.12 in x 4.33 in x 4.69 in [L x W x H]
	Height incl. installation housing short / long: 200 mm / 290 mm Height incl. installation housing short / long: 7.87 in / 11.42 in

Fixture Typ



RGBWquad

Color Temperatures W-Channel	3000 K, 4000 K, 6500 K
------------------------------	------------------------

Beam Angles	10°, 22°, 34°, 60°, 8° x 31° 10° x 40°, 12° x 60°, 12° x 90°, 30° x 60°, 30° x 58° (Tilt in C0-plane: -14°), 30° x 11° (Tilt in C0-plane: -14°)
-------------	--






Luminous Flux	311 lm Without glare protection
---------------	------------------------------------

Light Source	1 LED(s)
--------------	----------












Color Rendering Index	R _a ≥ 80
-----------------------	---------------------

Antiglare	Honeycomb, linear louver, customized glare control
-----------	--


Control	DMX, IOT, DALI
---------	----------------

Input Voltage	Power supply: internal 100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC
Power Consumption	Max. 12 W
Protection Class	I
Storage Temperatur	-40 °C / +80 °C -40 °F / +176 °F
Operating Temperature	-40 °C / +40 °C -40 °F / +104 °F
Start-up Temperature	-25 °C / +40 °C -13 °F / +104 °F
Lumen Maintenance [L70]	65'000 h @ 25 °C (77 °F) 40'000 h @ 40 °C (104 °F)
LED-Class	Class 2 LED product
Housing	Aluminum die casting
Housing Color(s)	Black anodized
Lens	Tempered safety glass
Frame	Stainless steel
Weight	1,3 kg (2.9 lbs)
Load	500 kg 1100 lbs
Ingress Protection	IP67
Environment	 indoor  outdoor
Impact Protection	IK09
Certification	  

Beam Angles

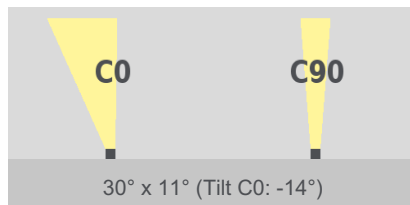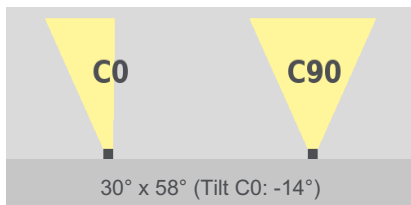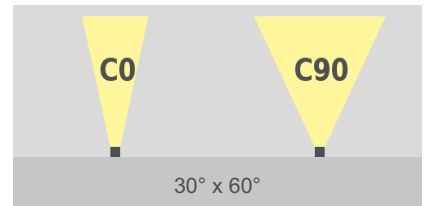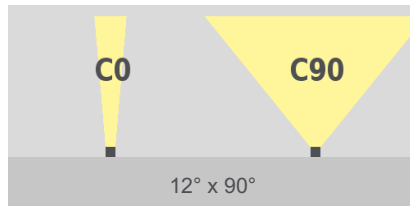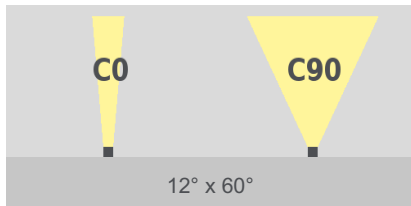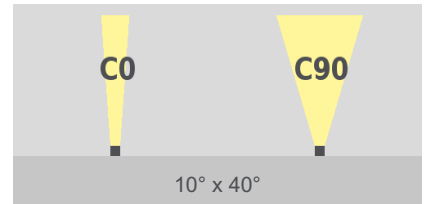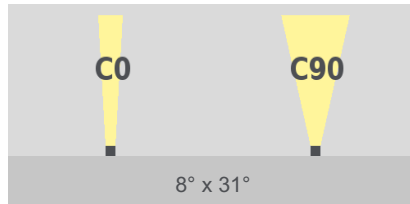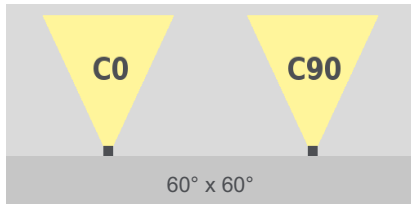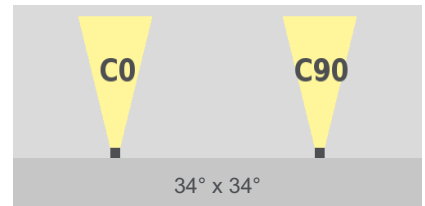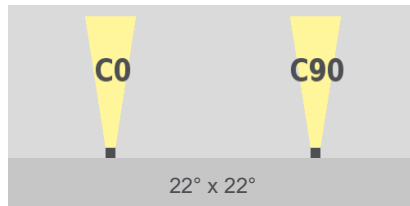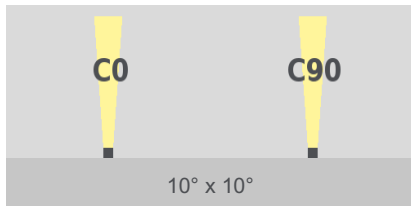

Engineering Drawing

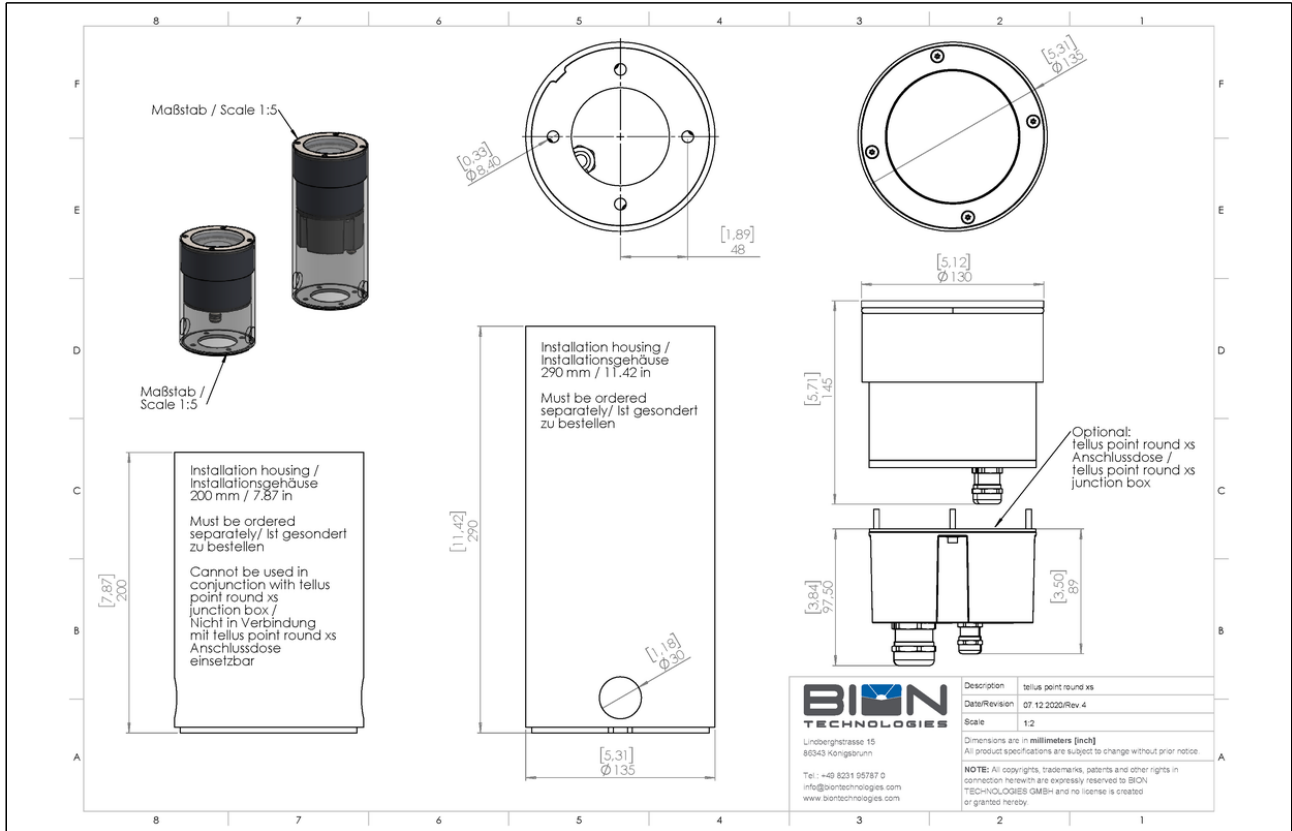

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your needs and write its corresponding code on the appropriate line to form the product code.

TEL-PO-RD-XS- _____ - _____ - _____ - _____ - _____ - Y01

TYP - LUMINOUS COLOR	DIMMING	BEAM ANGLE	WIRING	GLARE PROTECTION	LEADERCABLE LENGTH																																						
<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">TYP - LUMINOUS COLOR</th></tr> <tr><td>RGBW30 RGBW - 3000 K</td></tr> <tr><td>RGBW40 RGBW - 4000 K</td></tr> <tr><td>RGBW65 RGBW - 6500 K</td></tr> </table>	TYP - LUMINOUS COLOR	RGBW30 RGBW - 3000 K	RGBW40 RGBW - 4000 K	RGBW65 RGBW - 6500 K	<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">DIMMING</th></tr> <tr><td>NDIM Non-dimmable</td></tr> <tr><td>DMX Dimmable - DMX</td></tr> <tr><td>IOT Dimmable - IOT</td></tr> <tr><td>DALI Dimmable - DALI</td></tr> </table>	DIMMING	NDIM Non-dimmable	DMX Dimmable - DMX	IOT Dimmable - IOT	DALI Dimmable - DALI	<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">BEAM ANGLE</th></tr> <tr><td>10X10 10° x 10°</td></tr> <tr><td>22X22 22° x 22°</td></tr> <tr><td>34X34 34° x 34°</td></tr> <tr><td>60X60 60° x 60°</td></tr> <tr><td>8X31 8° x 31°</td></tr> <tr><td>10X40 10° x 40°</td></tr> <tr><td>12X60 12° x 60°</td></tr> <tr><td>12X90 12° x 90°</td></tr> <tr><td>30X60 30° x 60°</td></tr> <tr><td>WWW 30° x 58° (Tilt in C0-plane: -14°)</td></tr> <tr><td>WWN 30° x 11° (Tilt in C0-plane: -14°)</td></tr> </table>	BEAM ANGLE	10X10 10° x 10°	22X22 22° x 22°	34X34 34° x 34°	60X60 60° x 60°	8X31 8° x 31°	10X40 10° x 40°	12X60 12° x 60°	12X90 12° x 90°	30X60 30° x 60°	WWW 30° x 58° (Tilt in C0-plane: -14°)	WWN 30° x 11° (Tilt in C0-plane: -14°)	<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">WIRING</th></tr> <tr><td>CE Europe</td></tr> <tr><td>ETL North America</td></tr> </table>	WIRING	CE Europe	ETL North America	<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">GLARE PROTECTION</th></tr> <tr><td>OP No glare protection</td></tr> <tr><td>HL Honeycomb louver</td></tr> <tr><td>LL17 Linear louver 17°</td></tr> <tr><td>LL00 Linear louver 0°</td></tr> <tr><td>CGC customized glare control</td></tr> <tr><td colspan="2" style="font-size: small; color: #0070C0;">Use LL17 only with beam angle www or wwn</td></tr> </table>	GLARE PROTECTION	OP No glare protection	HL Honeycomb louver	LL17 Linear louver 17°	LL00 Linear louver 0°	CGC customized glare control	Use LL17 only with beam angle www or wwn		<table style="width: 100%; border-collapse: collapse;"> <tr><th style="text-align: left;">LEADERCABLE LENGTH</th></tr> <tr><td>1M 1 m (3.3 ft)</td></tr> <tr><td>3M 3 m (10 ft)</td></tr> <tr><td>6M 6 m (19.7 ft)</td></tr> <tr><td>9M 9 m (29.5 ft)</td></tr> <tr><td>15M 15 m (49.2 ft)</td></tr> </table>	LEADERCABLE LENGTH	1M 1 m (3.3 ft)	3M 3 m (10 ft)	6M 6 m (19.7 ft)	9M 9 m (29.5 ft)	15M 15 m (49.2 ft)
TYP - LUMINOUS COLOR																																											
RGBW30 RGBW - 3000 K																																											
RGBW40 RGBW - 4000 K																																											
RGBW65 RGBW - 6500 K																																											
DIMMING																																											
NDIM Non-dimmable																																											
DMX Dimmable - DMX																																											
IOT Dimmable - IOT																																											
DALI Dimmable - DALI																																											
BEAM ANGLE																																											
10X10 10° x 10°																																											
22X22 22° x 22°																																											
34X34 34° x 34°																																											
60X60 60° x 60°																																											
8X31 8° x 31°																																											
10X40 10° x 40°																																											
12X60 12° x 60°																																											
12X90 12° x 90°																																											
30X60 30° x 60°																																											
WWW 30° x 58° (Tilt in C0-plane: -14°)																																											
WWN 30° x 11° (Tilt in C0-plane: -14°)																																											
WIRING																																											
CE Europe																																											
ETL North America																																											
GLARE PROTECTION																																											
OP No glare protection																																											
HL Honeycomb louver																																											
LL17 Linear louver 17°																																											
LL00 Linear louver 0°																																											
CGC customized glare control																																											
Use LL17 only with beam angle www or wwn																																											
LEADERCABLE LENGTH																																											
1M 1 m (3.3 ft)																																											
3M 3 m (10 ft)																																											
6M 6 m (19.7 ft)																																											
9M 9 m (29.5 ft)																																											
15M 15 m (49.2 ft)																																											

Sample Order Code: TEL-PO-RD-XS-PW27-DMX-34X34-ETL-OP-Y01

* Project-specific options are available - Please contact our Sales Representative for further information.



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2023, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice