

VS 300-36

TECHNICAL DATASHEET

VS 300-36

Technical Data

Dimensions 350 mm x 320 mm x 90 mm [B x T x H]
13.78 in x 12.60 in x 3.55 in [B x T x H]

Control 0 - 10 V, DALI, DMX, POT, IOT

Input Voltage Power supply: internal |

Power Consumption Max. 350 W

Power Factor Correction > 0,94

Protection Class I

Output Voltage 36 VDC

Inrush COLD START 70A(t=1000 s measured at 50% I) at 230VAC; width peak Per NEMA 410
COLD START 35A(t=1000 s measured at 50% I) at 110VAC; width peak Per NEMA 410

Operating Temperature -20 °C / +40 °C | -4 °F / +104 °F

Housing Steel-sheet, powdercoated

Housing Color(s) White (RAL 9010)




Weight 5,7 kg (12.57 lbs)

Ingress Protection IP20

Environment 
indoor

Certification   

Engineering Drawing

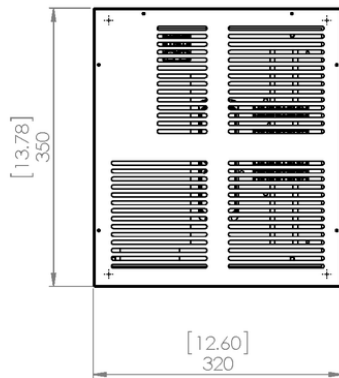

Dimensions are in millimeters [inch]
All product specifications are subject to change without prior notice.



Description	VS 600 tunableWhite	Scale	1:5
	Abmessungen / Dimensions	Pagesize	A4
Revision		Page	1/2



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2023, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice